

CHAPTER 23

GAUSS' LAW

BEIRUT SECTION

Mainly, every week one chapter will be introduced in the order shown in the following table (tentative schedule).

LECTURE	DATE	CHAPTERS
1,2	SEP 24, 26	Chapter 21: Electric Charge
3,4	OCT 1,3	Chapter 22: Electric Fields
5,6	OCT 8,10	Chapter 23: Gauss' Law
7,8	OCT 17,22,24	Chapter 24: Electric Potential
9,10	OCT 29, 31	Chapter 25: Capacitance
EXAM I (Chapter 21-25)		
11,12	NOV 5,7	Chapter 26: Current and Resistance
13,14	NOV 12,14	Chapter 27: Circuits
15,16	NOV 19,21	Chapter 28: Magnetic Fields
17,18	NOV 26,28	Chapter 29: Magnetic Fields Due to Current
19,20	DEC 3,5	Chapter 30: Induction and Inductance
EXAM II (Chapter 26-30)		
20,21	DEC10, 12	Chapter 31: Electromagnetic Oscillations and Alternating Current
22,23	DEC 17,19	Chapter 32: Maxwell's Equations
24,26	JAN 7, 9, 14,16,21	Chapter 33-34: Electromagnetic Waves - Images
FINAL EXAM (Chapter 21-34)		

BYBLOS SECTION

Mainly, every week one chapter will be introduced in the order shown in the following table (tentative schedule).

LECTURE	DATE	CHAPTERS
1,2,3	SEP 23,25,27	Chapter 21: Electric Charge
4,5,6	SEP 30, OCT 2,4	Chapter 22: Electric Fields
7,8,9	OCT 7,9,11	Chapter 23: Gauss' Law
10,11,12,13	OCT 16,18,21,23	Chapter 24: Electric Potential
14,15,16	OCT 25,28,30	Chapter 25: Capacitance
EXAM I (Chapter 21-25)		
17,18,19	NOV 1,6,8	Chapter 26: Current and Resistance
20,21	NOV 11,15	Chapter 27: Circuits
22,23	NOV 18,20	Chapter 28: Magnetic Fields
24,25,26	NOV 25,27,29	Chapter 29: Magnetic Fields Due to Current
27,28,29	DEC 2,4,6	Chapter 30: Induction and Inductance
EXAM II (Chapter 26-30)		
30,31,32	DEC 9,11,13	Chapter 31: Electromagnetic Oscillations and Alternating Current
33,34,35,36	DEC 16,18,20, 23	Chapter 32: Maxwell's Equations
37,38,39,40,41	JAN 8,10,15,17,20	Chapter 33-34: Electromagnetic Waves - Images
FINAL EXAM (Chapter 21-34)		

23-1

INTRODUCTION

Chapter 22: Electric field of an object

- We split the charge distribution up into charge elements dq ,
- Found the field due to an element, and resolved the vector into components
- Then we determined whether the components from all the elements would end up canceling or adding.
- Finally we summed the adding components by integrating over all the elements, with several changes in notation along the way.



Carl Friedrich Gauss (1777–1855)

- One of the primary goals of physics is to find simple ways of solving such labor-intensive problems.
- We can save far more work by using Gauss' law
- Gauss' law is an alternative method to calculate the electric field
- Gauss' law considers a hypothetical (imaginary) closed surface (**Gaussian surface**) enclosing the charge distribution
- The Gaussian surface mimics the symmetry of the charge distribution

The problems in this chapter are of two types:

- Sometimes we know the charge and we use Gauss' law to find the field at some point.
- Sometimes we know the field on a Gaussian surface and we use Gauss' law to find the charge enclosed by the surface.

We need a quantitative way of determining how much electric field pierces a surface. That measure is called the electric flux.

23-1

Electric Flux

23-1 Electric Flux

Learning Objectives

23.01 Identify that Gauss' law relates the electric field at points on a closed surface (real or imaginary, said to be a Gaussian surface) to the net charge enclosed by that surface.

23.02 Identify that the amount of electric field piercing a surface (not skimming along parallel to the surface) is the electric flux Φ through the surface.

23.03 Identify that an area vector for a flat surface is a vector that is perpendicular to the surface and that has a magnitude equal to the area of the surface.

23.04 Identify that any surface can be divided into area elements (patch elements) that are each small enough and flat enough for an area vector $d\mathbf{A}$ to be assigned to it, with the vector perpendicular to the element and having a magnitude equal to the area of the element.

23.05 Calculate the flux Φ through a surface by integrating the dot product of the electric field vector \mathbf{E} and the area vector $d\mathbf{A}$ (for patch elements) over the surface, in magnitude- angle notation and unit-vector notation.

23.06 For a closed surface, explain the algebraic signs associated with inward flux and outward flux.


23.07 Calculate the net flux ϕ through a closed surface, algebraic sign included, by integrating the dot product of the electric field vector \mathbf{E} and the area vector $d\mathbf{A}$ (for patch elements) over the full surface.

23.08 Determine whether a closed surface can be broken up into parts (such as the sides of a cube) to simplify the integration that yields the net flux through the surface.


23-1 Electric Flux




Gauss' law relates the electric field at points on a (closed) Gaussian surface to the net charge enclosed by that surface.

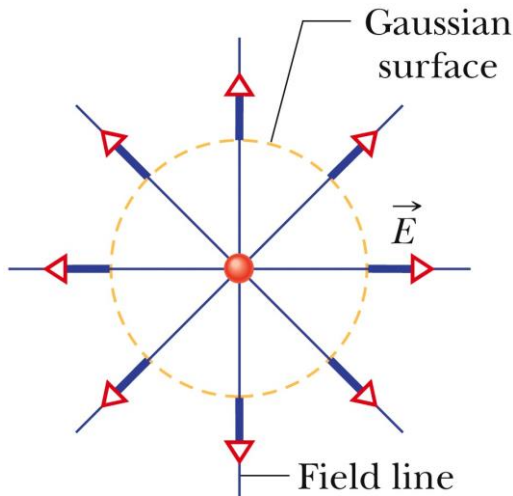

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

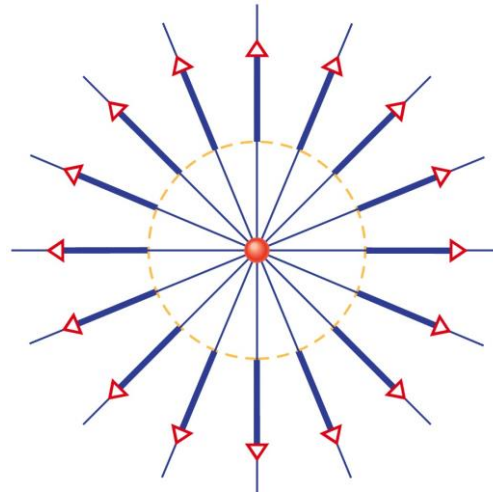

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

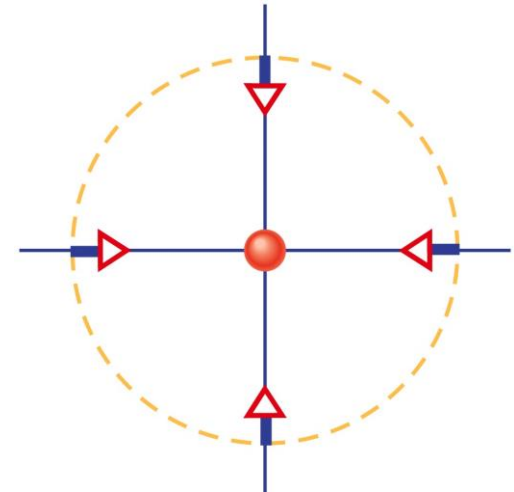

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

Electric field vectors and field lines pierce an imaginary, spherical Gaussian surface that encloses a particle with charge $+Q$.

Now the enclosed particle has charge $+2Q$.


Can you tell what the enclosed charge is now?
Answer: $-0.5Q$

23-1 Electric Flux

The **area vector** $d\mathbf{A}$ for an area element (patch element) on a surface is a vector that is perpendicular to the element and has a magnitude equal to the area dA of the element.

The **electric flux** $d\Phi$ through a patch element with area vector $d\mathbf{A}$ is given by a dot product:

$$d\Phi = \vec{E} \cdot d\vec{A}.$$

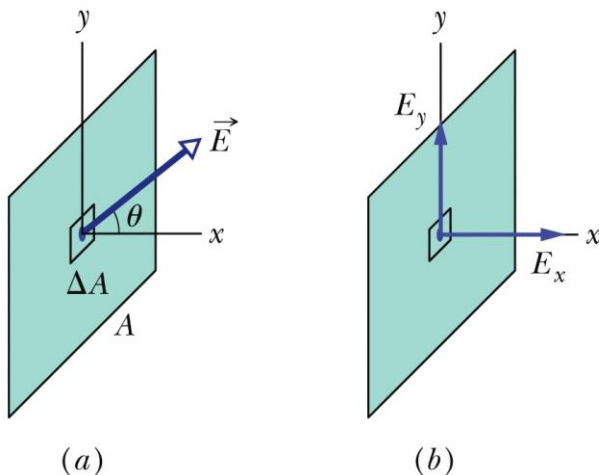

- (a) An electric field vector pierces a small square patch on a flat surface.
- (b) Only the x component actually pierces the patch; the y component skims across it.

$$E_x = E \cos \theta$$

$$\Delta\Phi = (E \cos \theta) \Delta A.$$

The SI unit of flux is the newton–square-meter per coulomb ($\text{N} \cdot \text{m}^2/\text{C}$)

23-1 Electric Flux

Now we can find the total flux by integrating the dot product over the full surface.

The **total flux** through a surface is given by

$$\Phi = \int \vec{E} \cdot d\vec{A} \quad (\text{total flux}).$$


The **net flux** through a closed surface (which is used in Gauss' law) is given by

$$\Phi = \oint \vec{E} \cdot d\vec{A} \quad (\text{net flux}).$$

where the integration is carried out over the entire surface.



An inward piercing field is negative flux. An outward piercing field is positive flux. A skimming field is zero flux.

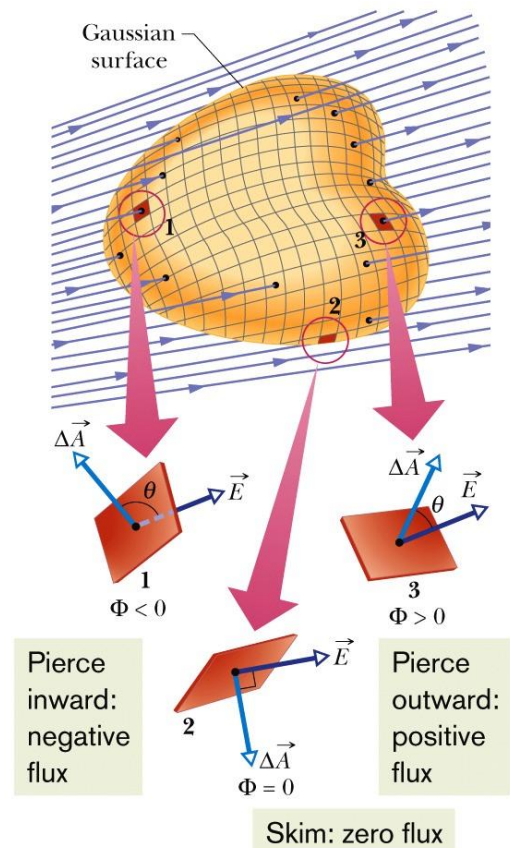

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

23-1 Electric Flux

Flux through a closed cylinder, uniform field

Figure 23-6 shows a Gaussian surface in the form of a closed cylinder (a Gaussian cylinder or G-cylinder) of radius R . It lies in a uniform electric field \vec{E} with the cylinder's central axis (along the length of the cylinder) parallel to the field. What is the net flux Φ of the electric field through the cylinder?

KEY IDEAS

We can find the net flux Φ with Eq. 23-4 by integrating the dot product $\vec{E} \cdot d\vec{A}$ over the cylinder's surface. However, we cannot write out functions so that we can do that with one integral. Instead, we need to be a bit clever: We break up the surface into sections with which we can actually evaluate an integral.

Calculations: We break the integral of Eq. 23-4 into three terms: integrals over the left cylinder cap a , the curved cylindrical surface b , and the right cap c :

$$\begin{aligned}\Phi &= \oint \vec{E} \cdot d\vec{A} \\ &= \int_a \vec{E} \cdot d\vec{A} + \int_b \vec{E} \cdot d\vec{A} + \int_c \vec{E} \cdot d\vec{A}. \quad (23-5)\end{aligned}$$

Pick a patch element on the left cap. Its area vector $d\vec{A}$ must be perpendicular to the patch and pointing away from the interior of the cylinder. In Fig. 23-6, that means the angle between it and the field piercing the patch is 180° . Also, note that the electric field through the end cap is uniform and thus E can be pulled out of the integration. So, we can write the flux through the left cap as

$$\int_a \vec{E} \cdot d\vec{A} = \int_a E(\cos 180^\circ) dA = -E \int_a dA = -EA,$$

where $\int_a dA$ gives the cap's area $A (= \pi R^2)$. Similarly, for the right cap, where $\theta = 0$ for all points,

$$\int_c \vec{E} \cdot d\vec{A} = \int_c E(\cos 0) dA = EA.$$

Finally, for the cylindrical surface, where the angle θ is 90° at all points,

$$\int_b \vec{E} \cdot d\vec{A} = \int_b E(\cos 90^\circ) dA = 0.$$

Substituting these results into Eq. 23-5 leads us to

$$\Phi = -EA + 0 + EA = 0. \quad (\text{Answer})$$

The net flux is zero because the field lines that represent the electric field all pass entirely through the Gaussian surface, from the left to the right.

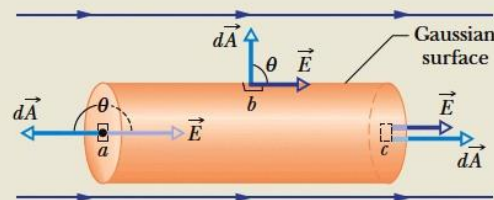


Figure 23-6 A cylindrical Gaussian surface, closed by end caps, is immersed in a uniform electric field. The cylinder axis is parallel to the field direction.

23-2

GAUSS' LAW

23-2 Gauss' Law

Learning Objectives

23.09 Apply Gauss' law to relate the net flux ϕ through a closed surface to the net enclosed charge q_{enc} .

23.10 Identify how the algebraic sign of the net enclosed charge corresponds to the direction (inward or outward) of the net flux through a Gaussian surface.

23.11 Identify that charge outside a Gaussian surface makes no contribution to the

net flux through the closed surface.

23.12 Derive the expression for the magnitude of the electric field of a charged particle by using Gauss' law.

23.13 Identify that for a charged particle or uniformly charged sphere, Gauss' law is applied with a Gaussian surface that is a concentric sphere.

23-2 Gauss' Law

Gauss' law relates the net flux Φ of an electric field through a closed surface (a Gaussian surface) to the *net* charge q_{enc} that is enclosed by that surface. It tells us that

$$\epsilon_0 \Phi = q_{enc} \quad (\text{Gauss' law}).$$

we can also write Gauss' law as


$$\epsilon_0 \oint \vec{E} \cdot d\vec{A} = q_{enc} \quad (\text{Gauss' law}).$$

23-2 Gauss' Law

Two charges, equal in magnitude but opposite in sign, and the field lines that represent their net electric field. Four Gaussian surfaces are shown in cross section.

Surface S1. The electric field is outward for all points on this surface. Thus, the flux of the electric field through this surface is positive, and so is the net charge within the surface, as Gauss' law requires

Surface S2. The electric field is inward for all points on this surface. Thus, the flux of the electric field through this surface is negative and so is the enclosed charge, as Gauss' law requires.

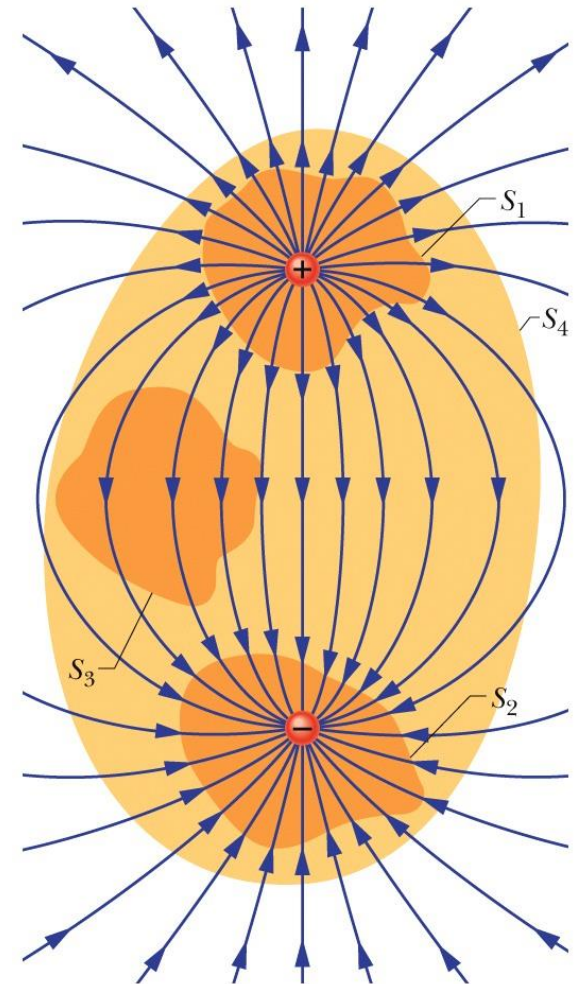


Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

23-2 Gauss' Law

Two charges, equal in magnitude but opposite in sign, and the field lines that represent their net electric field. Four Gaussian surfaces are shown in cross section.

Surface S3. This surface encloses no charge, and thus $q_{enc} = 0$. Gauss' law requires that the net flux of the electric field through this surface be zero. That is reasonable because all the field lines pass entirely through the surface, entering it at the top and leaving at the bottom.

Surface S4. This surface encloses no net charge, because the enclosed positive and negative charges have equal magnitudes. Gauss' law requires that the net flux of the electric field through this surface be zero. That is reasonable because there are as many field lines leaving surface S4 as entering it.

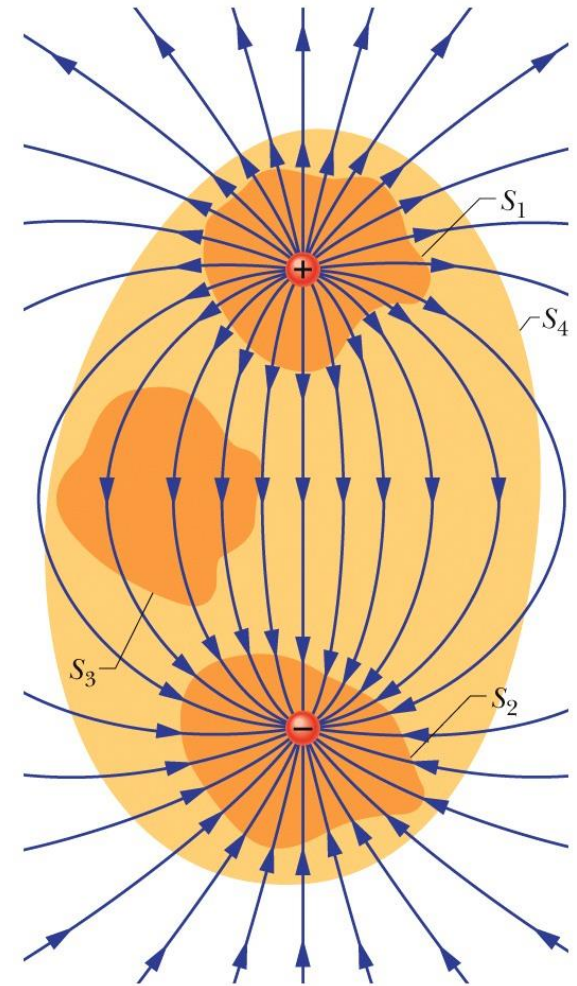

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

23-3

A Charged Isolated Conductor

23-3 A Charged Isolated Conductor

Learning Objectives

23.14 Apply the relationship between surface charge density σ and the area over which the charge is uniformly spread.

23.15 Identify that if excess charge (positive or negative) is placed on an isolated conductor, that charge moves to the surface and none is in the interior.

23.16 Identify the value of the electric field inside an isolated conductor.

23.17 For a conductor with a cavity that contains a charged object, determine the charge on the cavity wall and on the external surface.

23.18 Explain how Gauss' law is used to find the electric field magnitude E near an isolated conducting surface with a uniform surface charge density σ .


23.19 For a uniformly charged conducting surface, apply the relationship between the charge density σ and the electric field magnitude E at points near the conductor, and identify the direction of the field vectors.

23-3 A Charged Isolated Conductor



If an excess charge is placed on an isolated conductor, that amount of charge will move entirely to the surface of the conductor. None of the excess charge will be found within the body of the conductor.

- The electric field inside a conductor is zero
- Gauss' law is used to find the electric field magnitude E near an isolated conducting surface with a uniform surface charge density σ .

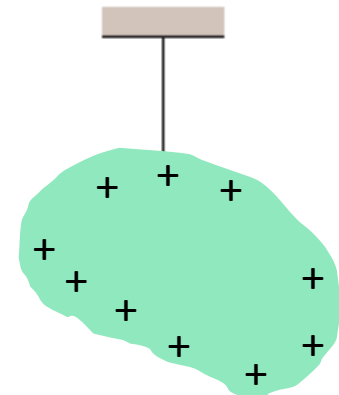

23-3 A Charged Isolated Conductor




If an excess charge is placed on an isolated conductor, that amount of charge will move entirely to the surface of the conductor. None of the excess charge will be found within the body of the conductor.

$$E = \frac{\sigma}{\epsilon_0} \quad (\text{conducting surface}).$$


(a) Perspective view

(b) Side view of a tiny portion of a large, isolated conductor with excess positive charge on its surface. A (closed) cylindrical Gaussian surface, embedded perpendicularly in the conductor, encloses some of the charge. Electric field lines pierce the external end cap of the cylinder, but not the internal end cap. The external end cap has area A and area vector \mathbf{A} .

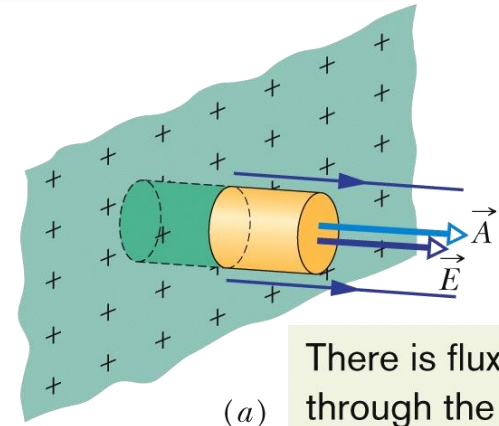

(a)

There is flux only through the external end face.

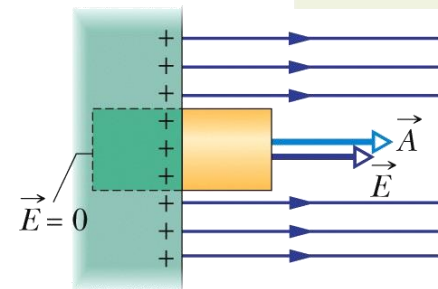

(b)

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

23-4

Applying Gauss' Law: Cylindrical Symmetry

23-4 Applying Gauss' Law: Cylindrical Symmetry

Learning Objectives


23.20 Explain how Gauss' law is used to derive the electric field magnitude outside a line of charge or a cylindrical surface (such as a plastic rod) with a uniform linear charge density λ .

23.21 Apply the relationship between linear charge density λ on a cylindrical surface and the electric field magnitude E at radial distance r from the central axis.

23.22 Explain how Gauss' law can be used to find the electric field magnitude inside a cylindrical non-conducting surface (such as a plastic rod) with a uniform volume charge density ρ .

23-4 Applying Gauss' Law: Cylindrical Symmetry

Figure shows a section of an **infinitely long cylindrical plastic rod with a uniform charge density λ** . The charge distribution and the field have cylindrical symmetry. To find the field at radius r , we enclose a section of the rod with a concentric Gaussian cylinder of radius r and height h . The net flux through the cylinder from Gauss' Law reduces to

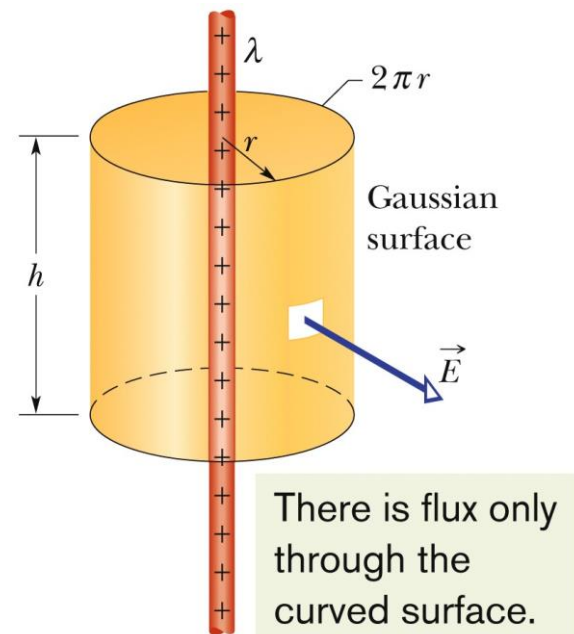

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

yielding

$$\Phi = EA \cos \theta = E(2\pi rh) \cos 0 = E(2\pi rh).$$

$$\epsilon_0 \Phi = q_{\text{enc}},$$

$$\epsilon_0 E(2\pi rh) = \lambda h,$$

$$E = \frac{\lambda}{2\pi\epsilon_0 r} \quad (\text{line of charge}).$$

A Gaussian surface in the form of a closed cylinder surrounds a section of a very long, uniformly charged, cylindrical plastic rod.

23-5

Applying Gauss' Law: Planar Symmetry

23-5 Applying Gauss' Law: Planar Symmetry

Learning Objectives

23.23 Apply Gauss' law to derive the electric field magnitude E near a large, flat, non-conducting surface with a uniform surface charge density σ .


23.24 For points near a large, flat non-conducting surface with a uniform charge density σ , apply the relationship between the charge density and the electric field magnitude E and also specify the direction of the field.

23.25 For points near two large, flat, parallel, conducting surfaces with a uniform charge density σ , apply the relationship between the charge density and the electric field magnitude E and also specify the direction of the field.

23-5 Applying Gauss' Law: Planar Symmetry

Non-conducting Sheet

Figure (a-b) shows a portion of a thin, infinite, non-conducting sheet with a uniform (positive) surface charge density σ . A sheet of thin plastic wrap, uniformly charged on one side, can serve as a simple model.

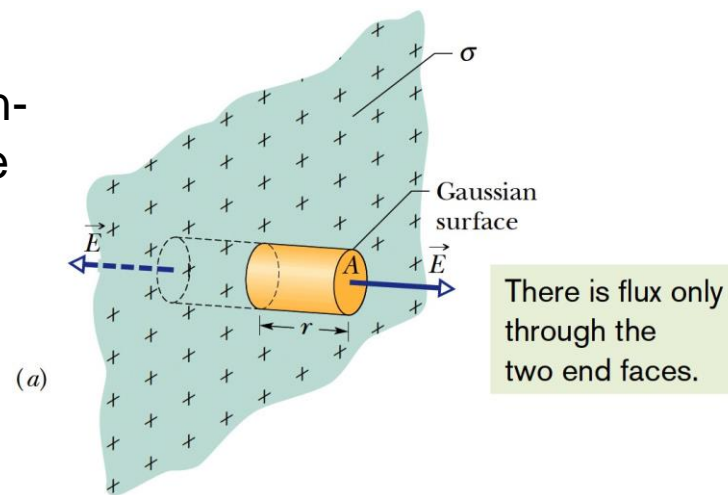

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

Gauss' Law,


$$\epsilon_0 \oint \vec{E} \cdot d\vec{A} = q_{\text{enc}}$$

becomes

$$\epsilon_0(EA + EA) = \sigma A,$$

where σA is the charge enclosed by the Gaussian surface. This gives

$$E = \frac{\sigma}{2\epsilon_0} \quad (\text{sheet of charge}).$$

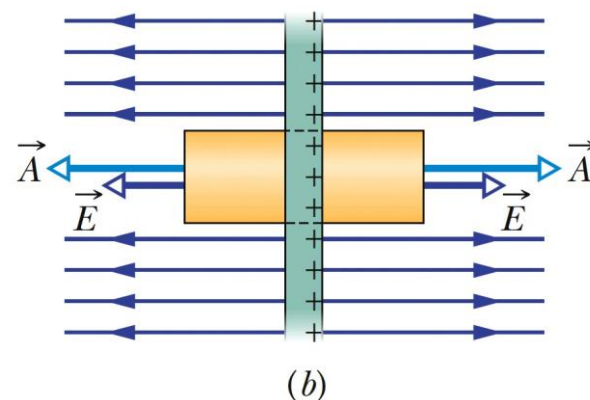


Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

23-5 Applying Gauss' Law: Planar Symmetry

Two conducting Plates

Figure (a) shows a cross section of a thin, infinite conducting plate with excess positive charge. **Figure (b)** shows an identical plate with excess negative charge having the same magnitude of surface charge density σ_1 .

Suppose we arrange for the plates of **Figs. a** and **b** to be close to each other and parallel **(c)**. Since the plates are conductors, when we bring them into this arrangement, the excess charge on one plate attracts the excess charge on the other plate, and all the excess charge moves onto the inner faces of the plates as in Fig.c. With twice as much charge now on each inner face, the electric field at any point between the plates has the magnitude

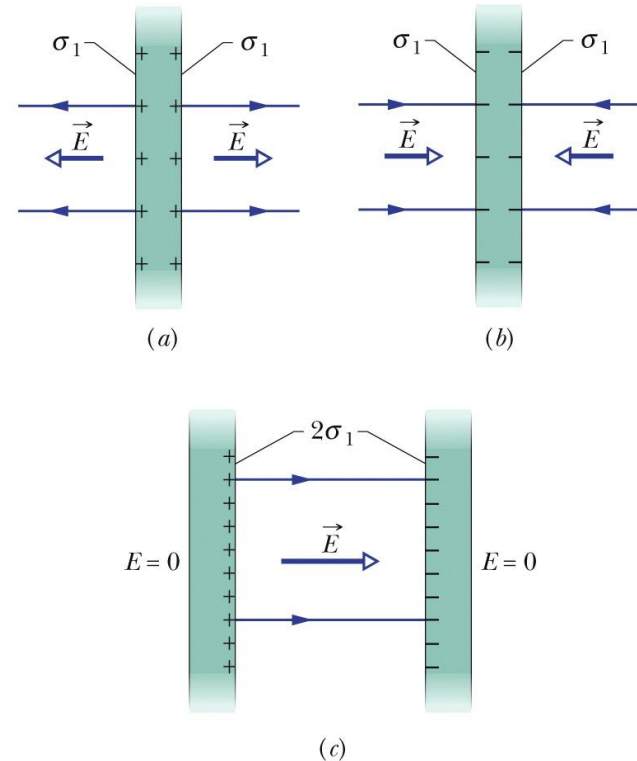

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

$$E = \frac{2\sigma_1}{\epsilon_0} = \frac{\sigma}{\epsilon_0}.$$

23-6

Applying Gauss' Law: Spherical Symmetry

23-6 Applying Gauss' Law: Spherical Symmetry

Learning Objectives

23.26 Identify that a shell of uniform charge attracts or repels a charged particle that is outside the shell as if all the shell's charge is concentrated at the center of the shell.

23.27 Identify that if a charged particle is enclosed by a shell of uniform charge, there is no electrostatic force on the particle from the shell.

23.28 For a point outside a spherical shell with uniform

charge, apply the relationship between the electric field magnitude E , the charge q on the shell, and the distance r from the shell's center.

23.29 Identify the magnitude of the electric field for points enclosed by a spherical shell with uniform charge.

23.30 For a uniform spherical charge distribution (a uniform ball of charge), determine the magnitude and direction of the electric field at interior and exterior points.


23-6 Applying Gauss' Law: Spherical Symmetry



A shell of uniform charge attracts or repels a charged particle that is outside the shell as if all the shell's charge were concentrated at the center of the shell.



If a charged particle is located inside a shell of uniform charge, there is no electrostatic force on the particle from the shell.

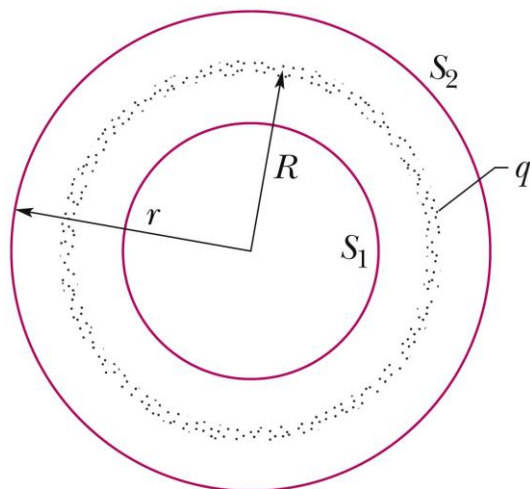

Copyright © 2014 John Wiley & Sons, Inc. All rights reserved.

A thin, uniformly charged, spherical shell with total charge q , in cross section. Two Gaussian surfaces S_1 and S_2 are also shown in cross section. Surface S_2 encloses the shell, and S_1 encloses only the empty interior of the shell.


In the figure, applying Gauss' law to surface S_2 , for which $r \geq R$, we would find that

$$E = \frac{1}{4\pi\epsilon_0} \frac{q}{r^2} \quad (\text{spherical shell, field at } r \geq R).$$

And, applying Gauss' law to surface S_1 , for which $r < R$,


$$E = 0 \quad (\text{spherical shell, field at } r < R),$$

23-6 Applying Gauss' Law: Spherical Symmetry

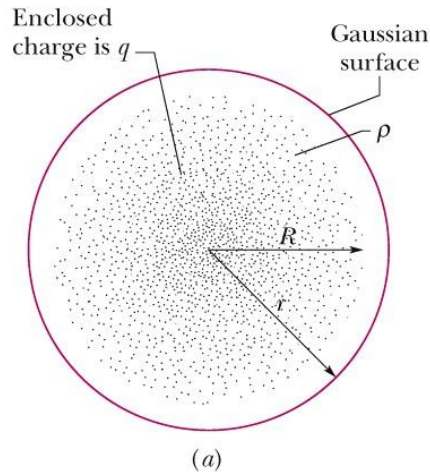

Inside a sphere with a uniform volume charge density, the field is radial and has the magnitude

$$E = \left(\frac{q}{4\pi\epsilon_0 R^3} \right) r \quad (\text{uniform charge, field at } r \leq R).$$

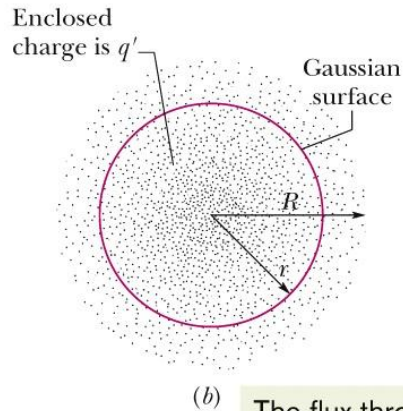

The flux through the surface depends on only the *enclosed* charge.

where q is the total charge, R is the sphere's radius, and r is the radial distance from the center of the sphere to the point of measurement as shown in figure.

A concentric spherical Gaussian surface with $r > R$ is shown in (a). A similar Gaussian surface with $r < R$ is shown in (b).

23-4

SUMMARY

23 Summary

Gauss' Law

- Gauss' law is

$$\epsilon_0 \Phi = q_{\text{enc}} \quad \text{Eq. 23-6}$$

- the net flux of the electric field through the surface:

$$\Phi = \oint \vec{E} \cdot d\vec{A} \quad \text{Eq. 23-6}$$

Applications of Gauss' Law

- surface of a charged conductor

$$E = \frac{\sigma}{\epsilon_0} \quad \text{Eq. 23-11}$$

- Within the surface $E=0$.
- line of charge

$$E = \frac{\lambda}{2\pi\epsilon_0 r} \quad \text{Eq. 23-12}$$

- Infinite non-conducting sheet

$$E = \frac{\sigma}{2\epsilon_0} \quad \text{Eq. 23-13}$$

- Outside a spherical shell of charge

$$E = \frac{1}{4\pi\epsilon_0} \frac{q}{r^2} \quad \text{Eq. 23-15}$$

- Inside a uniform spherical shell

$$E = 0 \quad \text{Eq. 23-16}$$

- Inside a uniform sphere of charge

$$E = \left(\frac{q}{4\pi\epsilon_0 R^3} \right) r. \quad \text{Eq. 23-20}$$