

85
/ 100

NAME: Amanda Abille

NOTE1: OPEN BOOK. OPEN NOTES. CLOSED OLD TESTS AND SOLUTIONS.
NOTE2: SHOW ALL WORK IN ORDER TO RECEIVE FULL CREDIT.

1. 20 Pts. A continuous-time signal $x(t)$ is shown in Fig.P1. Sketch and label carefully each of the following signals.

- ① 16
- ② 15
- ③ 15
- ④ 19
- ⑤ 20

- a) $-3x(-t/3 - 3) + 3$
- b) $x(-3t - 2)u(t - 1)$

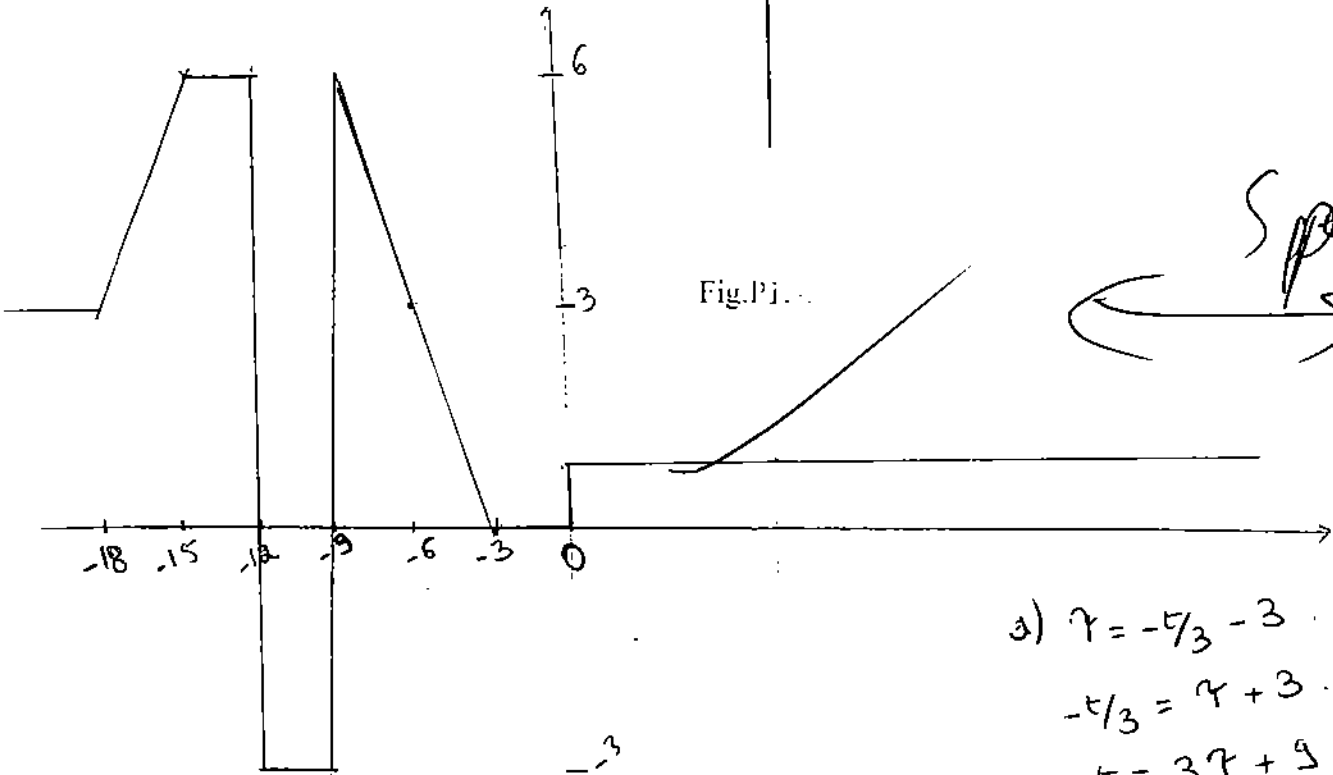
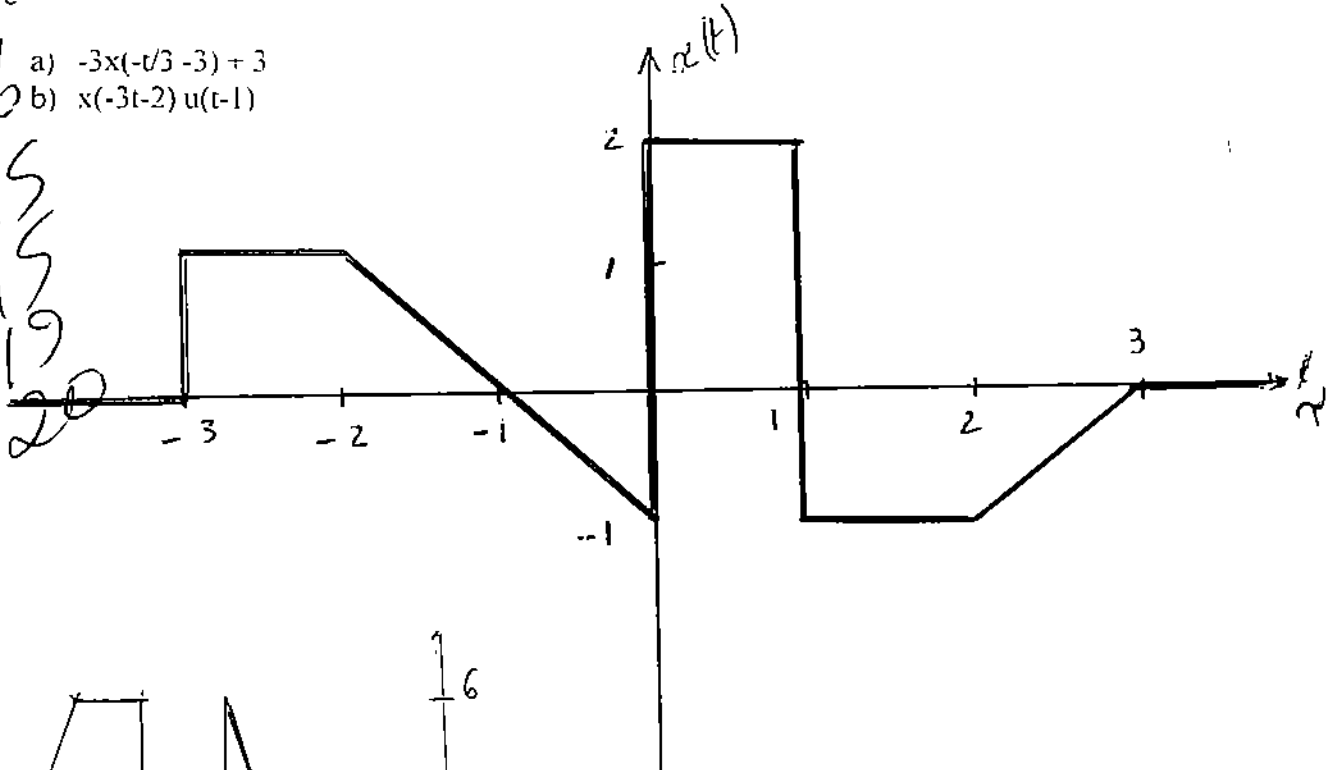


Fig.P1...

Spread


a) $\tau = -t/3 - 3$

$-t/3 = \tau + 3$

$-t = 3\tau + 9$

$t = -3\tau - 9$

b)

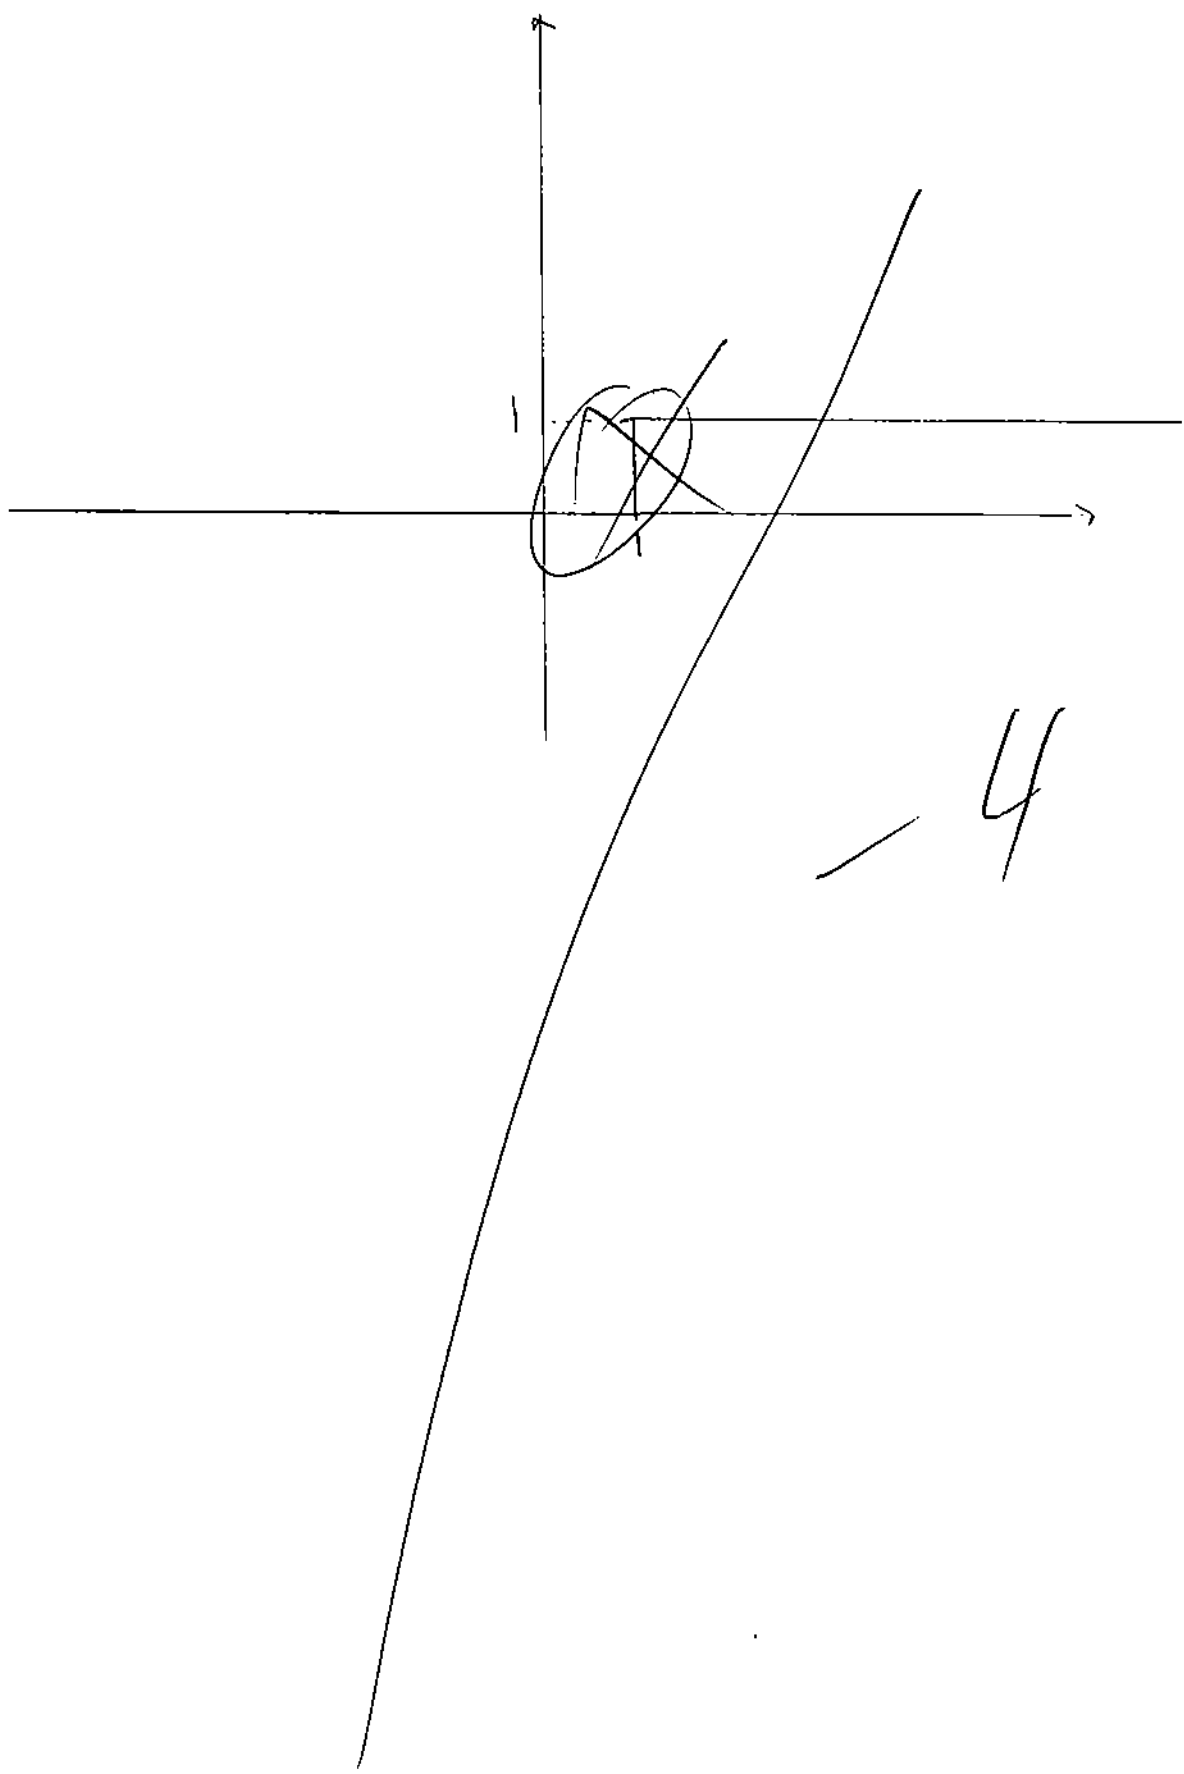

4

2. 15 Pts. Two discrete-time signals $x_1[n]$ and $x_2[n]$ are shown in Fig.P2. Find $x_1[n]$ as a function of $x_2[n]$

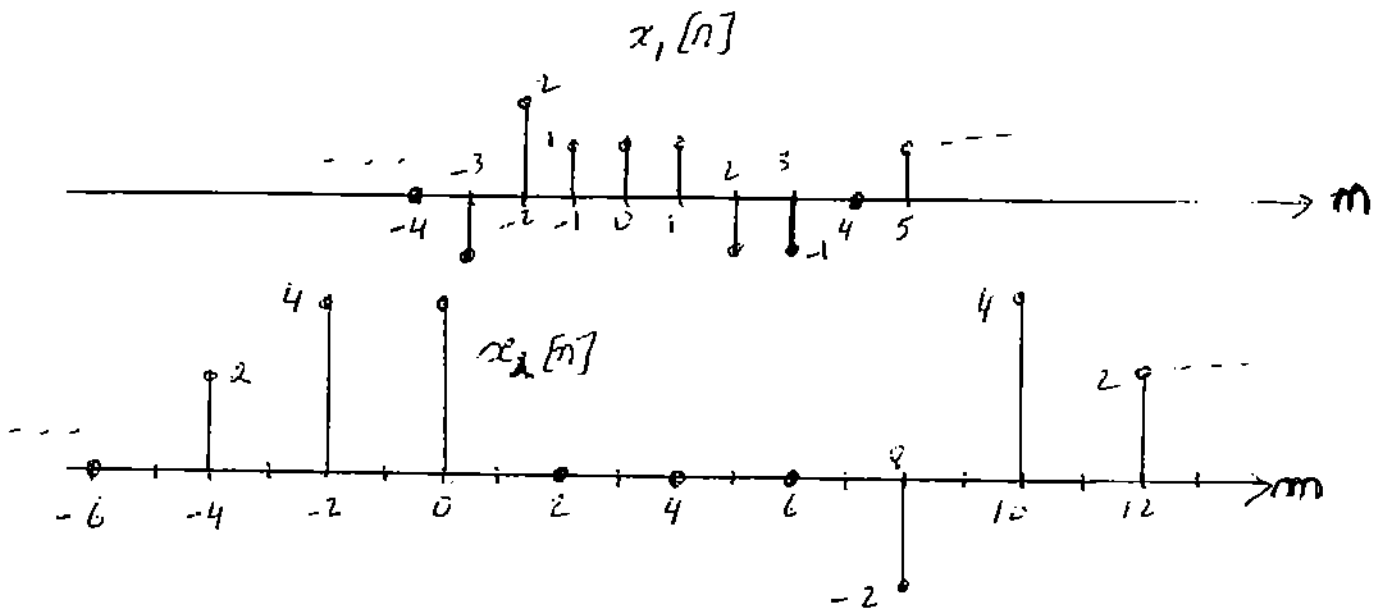


Fig.P2

$$x_1[m] = -\frac{1}{2} x_2[-2m + 4] + 1$$

scale of x_1 : 10
 scale of x_2 : 20

amplitude at x_1 : 3
 amplitude at x_2 : 6

$$\begin{aligned} m &= -2m + a \\ 2 &= -2 + a \\ a &= 4 \\ -6 &= -10 + a \\ \boxed{a=4} \end{aligned}$$

~~Handwritten scribbles~~

$$\begin{aligned} 2 &= -\frac{1}{2} x_2[?] + \text{offset} \\ 2 &= -\frac{1}{2} (-2) + \text{offset} \\ 2 &= 1 + \text{offset} \Rightarrow \text{offset} = 1 \end{aligned}$$

3. 15 Pts. Determine and sketch the even part of the signal depicted in Fig.P3. Label your sketch carefully.





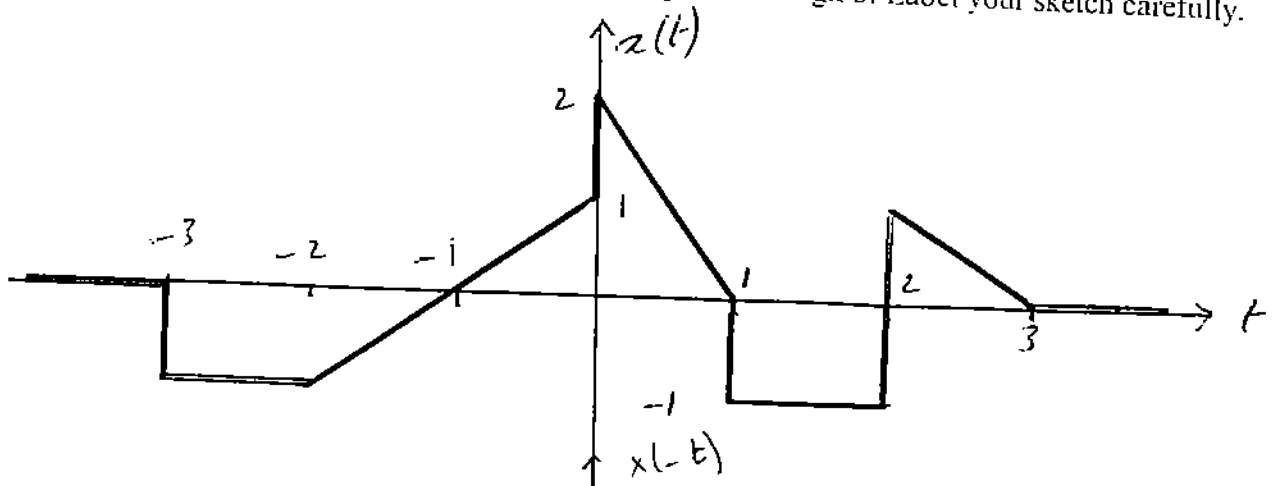


Fig.P3

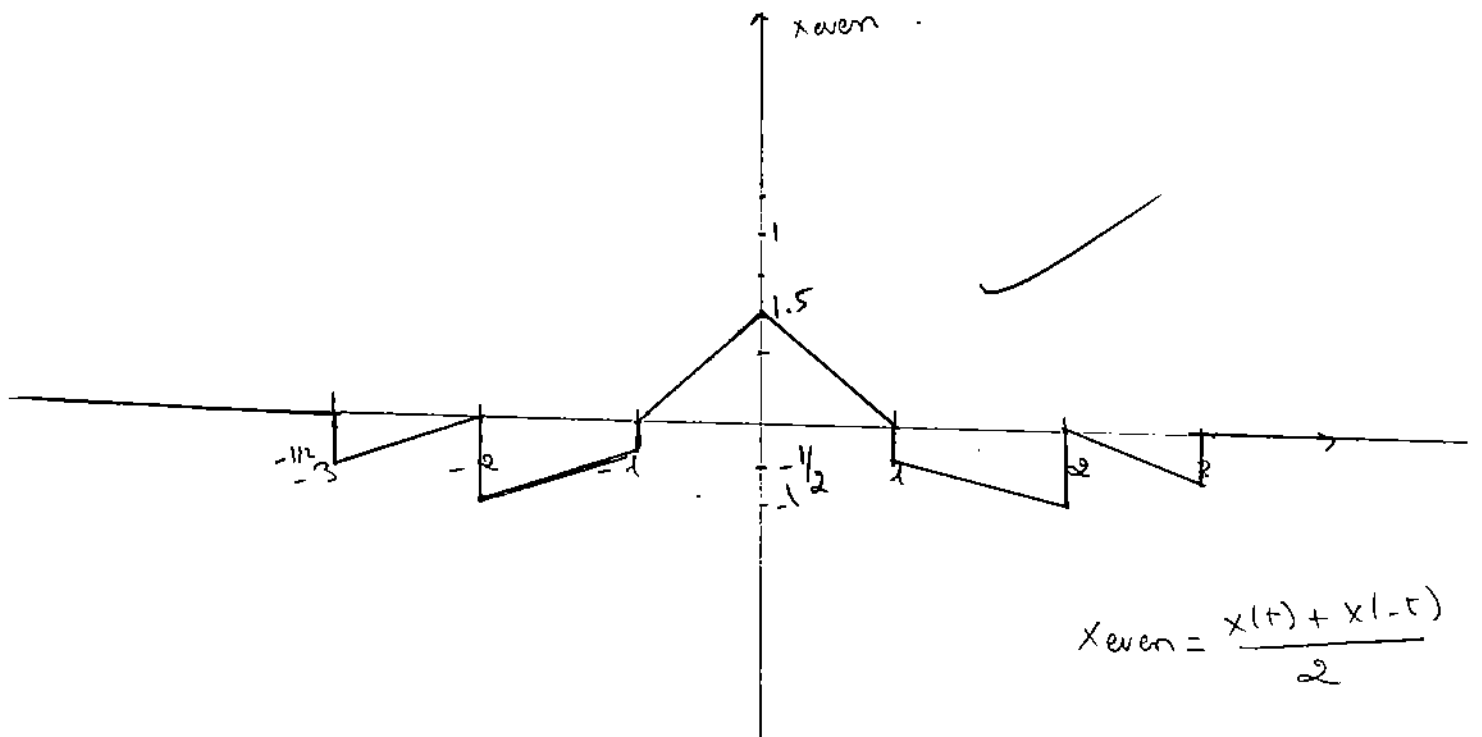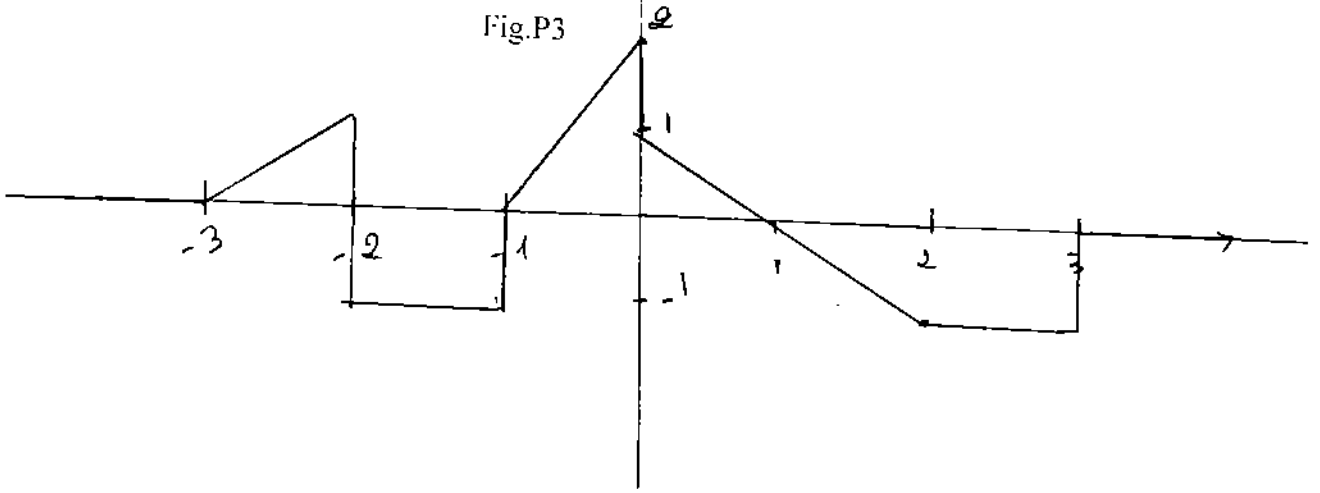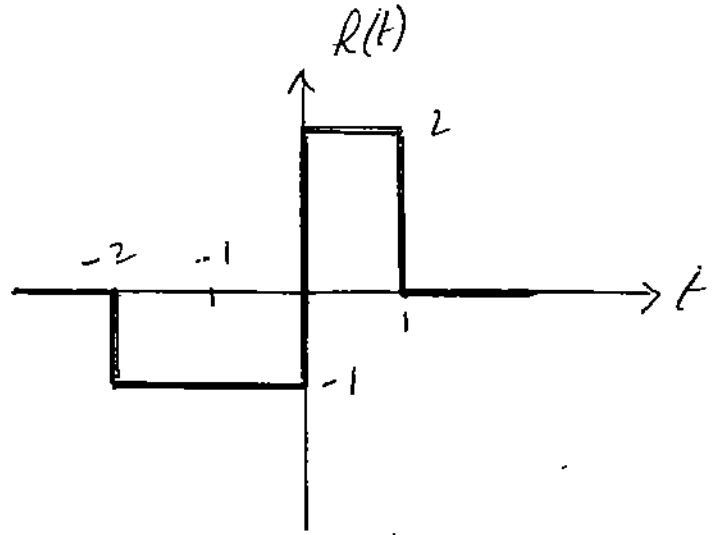

4. 30 Pts. For the LTI system shown in Fig.P4, the input is $x(t)$, the output is $y(t)$, and the impulse response is $h(t)$. Use the convolution integral to find the output $y(t)$. (Do not integrate)

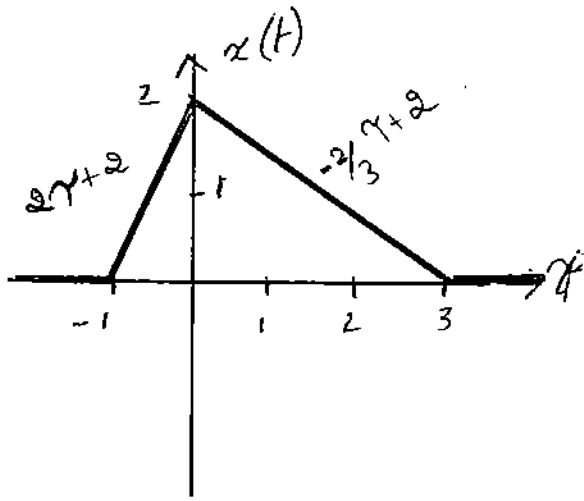

$$y(t) = x(t) * h(t) = \int_{-\infty}^{\infty} x(\tau) h(t-\tau) d\tau \quad \text{Fig.P4}$$

$$y = ax + b$$

$$a = b$$

$$y = 0x + 2$$

$$0 = -a + 2$$

$$a = 2$$

$$y = 0x + 0$$

$$0 = a$$

$$y = 0x + 2$$

$$0 = 3a - 2$$

$$3a = 2$$

$$a = 2/3$$

① $t+2 \leq -1 \Rightarrow t \leq -3$ $y(t) = 0$

② $-3 \leq t \leq -1$ $y(t) = \int_{-1}^t 2(2\tau+2) d\tau = 0$

$-2 \leq t \leq -1$

③ $-1 \leq t \leq 0$

$$y(t) = \int_{-1}^t 2(2\tau+2) d\tau + \int_{-1}^t 2 d\tau + \int_{-1}^t -2 d\tau$$

④ $0 \leq t \leq 1$

$$y(t) = \int_{-1}^t 2(2\tau+2) d\tau + \int_0^t 2(-\frac{2}{3}\tau+2) d\tau + \int_{-1}^t -2 d\tau$$

⑤ $1 \leq t \leq 3$

$$y(t) = \int_{-1}^t 2(-\frac{2}{3}\tau+2) d\tau + \int_0^t 2(-\frac{2}{3}\tau+2) d\tau + \int_{-1}^t -2 d\tau$$

⑥ $3 \leq t \leq 4$

$$y(t) = \int_{-1}^t 2(-\frac{2}{3}\tau+2) d\tau$$

$t \geq 4$ $y(t) = 0$



5. 20 Pts. For the discrete LTI system shown in Fig.P5, find the impulse response $h[n]$.

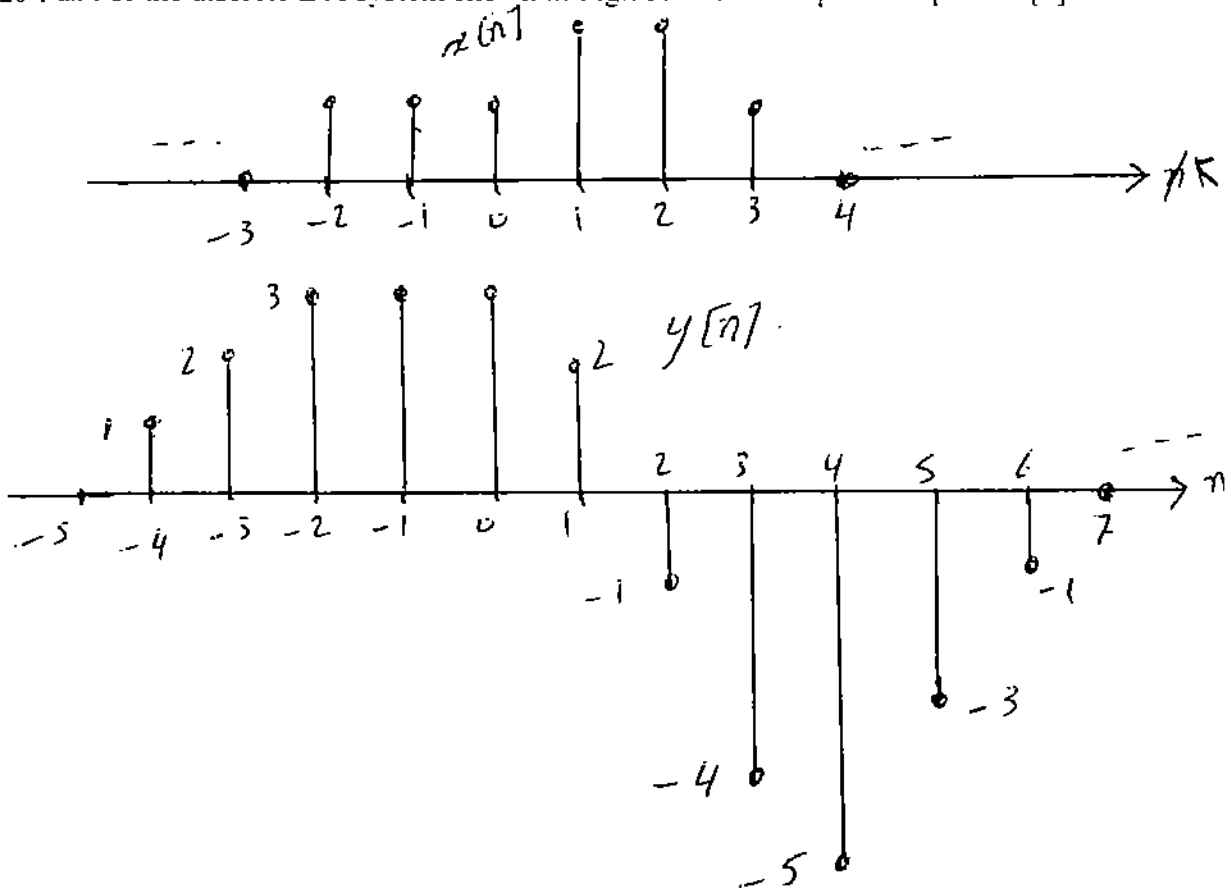


Fig.P5.

on
temporary

